VR4KAM2W

Vandal Resistant 4000 series 0-button, 1-button, 2-button, 3-button or 1-button with nameplate audio speaker module for the VX2200 digital system

VR4KAM2W-1/Y

Vandal Resistant 4000 series audio speaker module

Functional two way speech amplifier module (**Art.138**) for the VX2200 digital system, for both audio and audio/video systems.

DDA compliant call progress LEDs and call reassurance tones

The audio modules are equipped with call progress status LEDs: speak, busy and door open. Call reassurance tones to let the visitor know the call is in progress.

High contrast yellow bezel buttons

DDA compliant high contrasting yellow bezel button options available.

Volt free contacts

Dry relay contacts to connect a fail secure or fail safe lock release or gate controls.

4000 series modular design

Robust modular design compatible with all 4000 series surface and flush back boxes.

Available finishes and versions

VR4KAM2W-0	VR4KAM2W-1 VR4KAM2W-1/Y	VR4KAM2W-2 VR4KAM2W-2/Y	VR4KAM2W-3 VR4KAM2W-3/Y	VR4KAM2W-1NP VR4KAM2W-1NP/Y

2.5mm brushed stainless steel front fascia

DDA

IK09

IP55

THE POWER TO SECURE

Vandal Resistant 4000 series 0-button, 1-button, 2-button, 3-button or 1-button with nameplate audio speaker module for the VX2200 digital system

- Compatible with the full range of 4000 series surface and flush back boxes and front support frames.
- Impact Protection rating **IK09** and ingress protection rating **IP55**.
- DDA compliant call progress LEDs (speak, busy and door open) and call reassurance tones.
- Microphone, speaker volume and balance control POTs.
- Power supply input via 12Vdc PSU (**521B** or **2291** series control cabinet).

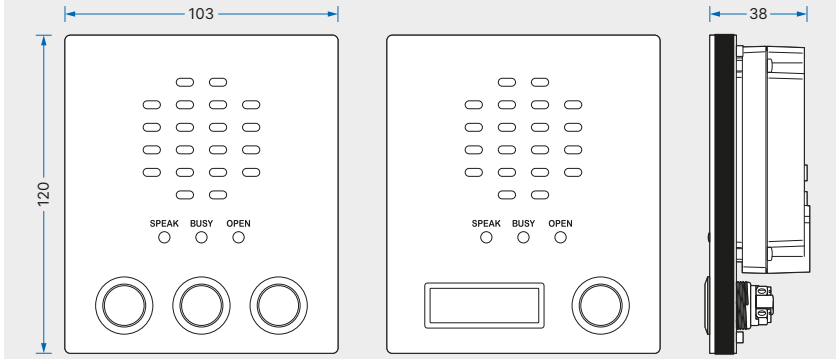

(measurements in mm)

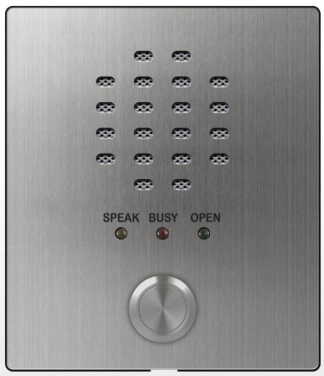

VR4KAM2W-1

Technical characteristics

	VR4KAM2W-0	VR4KAM2W-1	VR4KAM2W-3	VR4KAM2W-3	VR4KAM2W-1NP
Description	Vandal Resistant 4000 series audio speaker (**Art.138**) for the VX2200 digital system.				
Audio/Video	Audio only module however can be used on video systems.				
No. of buttons	0	1	2	3	1
Nameplate	n/a	n/a	n/a	n/a	1, back-lit white
High contrast yellow bezel button option	Yes: high contrast yellow bezel button versions available suffix **/Y** to part code (except 0 button version), i.e. **VR4KAM2W-1/Y** and so on.				
Module protection	**IK09** impact protection and **IP55** ingress protection ratings.				
Call Progress LEDs	Yes: 3xLEDs - speak (yellow), busy (red) and door open (green) LEDs.				
Module programming	Via dip-switches, SW1: master/slave; SW2/SW3: programming of 24 push button group; SW4: conversation time (1 or 2 mins); SW5: relay operating time (2 or 6 secs); SW6/SW7/SW8: device ID number (ID.1 up to ID8).				
Module Size	1 module 4000 series: 103 (W) x 120 (L) x 38 (D) mm.				
Adjustment POTs	Yes: microphone and speaker volume controls and audio balance control.				
No. of relays	1 internal relay.				
Relay details, voltage and current ratings	Dry contacts: CO, NO and NC, voltage rating: 24Vac/dc / current rating: 2A max.				
PTE input	Yes: 1xPTE switched 0V input (push-to-make).				
Working voltage	12Vdc (compatible PSU's: **521B** and **2291** series control cabinets).				
Power consumption	Standby: 30mA / during operation: 200mA (max.).				
Working temperature	-20°/+60°C.				

VIDEX U.K. Ltd

Main Office
Unit 4-7 Chillingham Ind. Estate, Chapman Street,
Newcastle Upon Tyne, NE6 2XX
tel: 0370 300 1240
sales@videxuk.com **www.videxuk.com**

Although every effort has been made to provide accurate information, there may be technical or print errors in this data sheet. Videx reserves the right to make changes, corrections and improvements to such information at any time and without prior notice.