

VR4KDDA

VR4K
SERIES

Vandal Resistant 4000 series 1-button DDA and 2-button DDA modules for audio and audio/video systems



Vandal Resistant 4000 series DDA braille button expansion modules

The VR4K series DDA braille button modules have been manufactured to be compliant in accordance with the **Equality Act 2010 (UK)**.

The DDA buttons feature a brushed stainless steel finish with an embossed "CALL" legend, which is also back-lit red with "CALL" spelled out in braille underneath as well as a red halo illumination.

These useful button modules provides the means for the visually impaired to place a call on the door entry system with the utmost confidence.

Vandal Resistant fascia

316 grade vertically brushed stainless steel front fascia with IP65 protection rating.

DDA compliant braille call buttons

DDA compliant vandal resistant **US91-15** braille call button in accordance with the **Equality Act 2010 (UK)** that meets the **EN81-71** standard.

4000 series modular design

Robust modular design compatible with all 4000 series surface and flush back boxes.

Available finishes and versions



VR4KDDA1



VR4KDDA2

2.5mm brushed stainless steel



BRAILLE



IK09




IP54



IP55



THE POWER TO SECURE

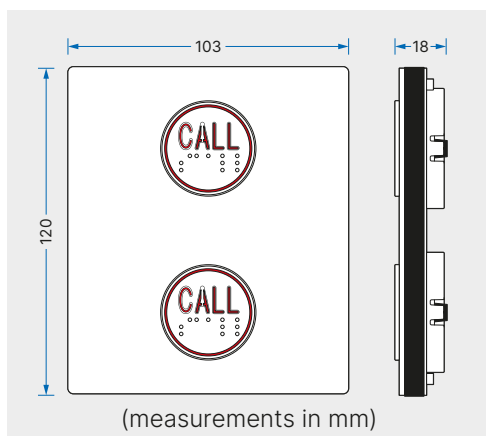

**Compatible with the
full range of 4000
series surface and
flush back boxes and
front support frames**



Technical characteristics

	VR4KDDA1	VR4KDDA2
Description	Vandal Resistant 4000 series DDA braille button expansion modules for multiple VIDEX audio and audio/video systems.	
No. of buttons	1	2
Materials	12 gauge (2.5mm thick) 316 marine grade vertically brushed stainless steel.	
Module protection	IK09 impact protection rating with IP55 ingress protection for the stainless steel front fascia.	
DDA compliant	DDA compliant in accordance with the Equality Act 2010 (UK) .	
Button type	Low profile compact 3P micro switch body type, US91-15 push button with embossed "CALL" legend and red LED halo illumination and with "CALL" in braille underneath.	
Button protections	Vandal resistant button (meets EN81-71 standard). IP54 rating (meets EN60529 standard and code compliance EN81-20 and EN81-70).	
LED illumination	Yes, 1x 12Vdc red LED to illuminate halo back light a "CALL" legend.	
Button connections	4 connections per button: +12/GND input (to power red LED backlight), CO/NO spade connector contacts.	
Voltage input	12Vdc input.	
Current rating	20mA (approx. per button).	
Module size	1 module 4000 series: 103 (W) x 120 (L) x 18 (D) mm.	
Working temperature	-20°/+60°C.	



Main Office

Unit 4-7 Chillingham Ind. Estate, Chapman Street,
Newcastle Upon Tyne, NE6 2XX

tel: 0370 300 1240

sales@videxuk.com

www.videxuk.com

