3102A/G

3000 Series audiophone for "4+1" audio & "4+1" audio/video systems with a gate hold open switch

3 level call tone switch

Intercom audiophone

A 3000 series intercom audiophone with AC buzzer, electronic call tone and mute switch.

2 push buttons

Two push buttons: for door open lock release and a spare service button.

Hold open switch

Volt free gate hold open switch.

Call tone switch

3 level call tone volume switch (low, medium and high).

Can be mounted onto a table top using a desktop kit

The **3102A/G** audiophone is a surface mount 2 button intercom phone with a gate hold open switch for use on traditional "4+1" audio & "4+1" audio/video systems. Manufactured from shockproof ABS plastics in a white finish.

3000 AUDIO

4+1 AUDIO

HOLD OPEN

DESK KIT

VIDEX®

3000 Series audiophone for traditional "4+1" audio and "4+1" audio/video systems

- 2 push buttons: door open and spare service button.
- AC buzzer call and electronic call tone.
- Volt free hold open switch for gate or barrier controls.
- 3 level call tone volume adjustment: low, medium and high (for electronic call tone only).
- Surface wall mounted or via desktop kit.
- Manufactured from shockproof ABS plastics, white finish.

Technical characteristics

Series	3000 series full base audiophone.
System compatiblity	Can be used on "4+1" audiokits: 4K series, 8K series, VR4K series and VR120DK series. Can also be used on traditional "4+1" audio & video systems that require an AC buzzer call.
Call type	AC buzzer call or electronic call tone.
Number of buttons and function	2: door open and spare service button.
Override switch	Yes, volt free switch for gate/barrier hold open input.
Privacy/mute facility	No.
LEDs	No.
Adjustments	3 level call tone volume switch: low, medium and high (electronic call tone only). Mute ON/OFF privacy switch (for the AC buzzer call only).
Connection[1]	7 wires total: 4 common wires (transmit speech, receive speech, GND & lock release), 2 wires for the hold open input on gate/barrier controls + 1 call wire.
Working temperature	-10°/+50°C.
Mounting	Surface (wall) or via desktop kit.
Material & finishes	White ABS shockproof plastics.
Dimensions (mm)	85 (W) x 218 (L) x 55 (D).
Desktop kit	**3038.**

[1] Additional wires will be required if using the spare service button.

Accessories

3038 Desktop kit
(inc. **895** wall socket)

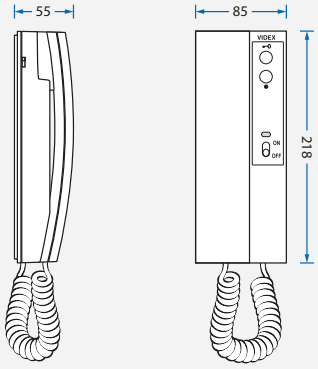

Measurements in mm

VIDEX U.K. Ltd

Main Office
Unit 4-7 Chillingham Ind. Estate, Chapman Street,
Newcastle Upon Tyne, NE6 2XX
tel: 0370 300 1240
sales@videxuk.com **www.videxuk.com**

Although every effort has been made to provide accurate information, there may be technical or print errors in this data sheet. Videx reserves the right to make changes, corrections and improvements to such information at any time and without prior notice.