3117

3000 SERIES

3000 Series audiophone for "4+1" audio systems and intercommunication systems

3 level call tone switch

Intercom audiophone

A 3000 series intercommunication audiophone with electronic call tone.

5 push buttons

Five push buttons: for door open lock release and 4 intercommunication call/spare service buttons.

Call tone switch

3 level call tone volume switch (low, medium and high).

Can be mounted onto a table top using a desktop kit for an easy and practical alternative to a wall mount solution.

The **3117** audiophone is a surface mount 5 button intercom phone for use on "4+1" audio systems and for intercommunication systems. Manufactured from shockproof ABS plastics in a white finish.

4+1 AUDIO

INTERCOMMUNICATION

DESK KIT

VIDEX®

3000 Series audiophone for traditional "4+1" audio systems and audio intercommunication systems

- 5 push buttons: door open and 4 intercommunication call or spare service buttons.
- Electronic call tone.
- 3 level call tone volume adjustment: low, medium and high.
- Compatible with 4K series, 8K series, VR4K series and VR120DK series "4+1" audiokits.
- Surface wall mounted or via desktop kit.
- Manufactured from shockproof ABS plastics, white finish.

Technical characteristics

Series	3000 series full base audiophone.
System compatiblity	Can be used on "4+1" audiokits: 4K series, 8K series, VR4K series and VR120DK series. Can also be used on 4 way audio intercommunicating system with the **510N** tone generator/ switching relay utilising the 4 service buttons (1 - 4).
Call type	Electronic call tone.
Number of buttons and function	5: 1x door open button and 4x intercommunication call/spare service buttons.
Privacy/mute facility	No.
LEDs	No.
Adjustments	3 level call tone volume switch: low, medium and high. Internal jumper JP1 for button isolation.
Connection	For "4+1" audio system 5 wires total: 4 common wires (transmit speech, receive speech, GND & lock release) + 1 call wire. For intercommunicating system 11 wires total: 4 common wires (as above) + 1 external call wire, + 1 internal call wire, + 4 intercommunication call wires and 1 internal tone wire (T).
Working temperature	-10°/+50°C.
Mounting	Surface (wall) or via desktop kit.
Material & finishes	White ABS shockproof plastics.
Dimensions (mm)	85 (W) x 218 (L) x 55 (D).
Desktop kit	**3038.**

Accessories

3038 Desktop kit
(inc. **895** wall socket)

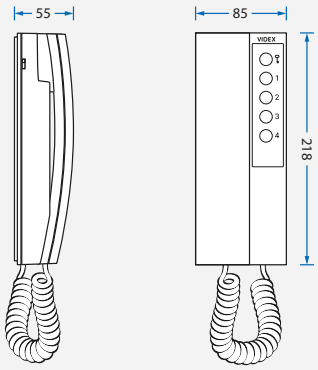

Measurements in mm

VIDEX U.K. Ltd

Main Office
Unit 4-7 Chillingham Ind. Estate, Chapman Street,
Newcastle Upon Tyne, NE6 2XX
tel: 0370 300 1240
sales@videxuk.com **www.videxuk.com**

DS-3117-ENUK-V2-1-02/10/26

Although every effort has been made to provide accurate information, there may be technical or print errors in this data sheet. Videx reserves the right to make changes, corrections and improvements to such information at any time and without prior notice.