3176

3000 Series audiophone for the VX2200 digital system

3 level call tone switch

The **3176** audiophone is a surface mount 2 button intercom phone with privacy facility and indication LEDs for use on the VX2200 digital system (audio & video). Manufactured from shockproof ABS plastics in a white finish.

VX2200

Intercom audiophone

A 3000 series intercom audiophone with electronic call tone & privacy button.

2 push buttons

Two push buttons: for door open lock release/concierge call and a privacy ON/OFF button.

LED indication

2 LEDs: green door open LED and red privacy ON/OFF LED.

Call tone switch

3 level call tone volume switch (low, medium and high).

Adjustments

Adjustable number of rings: 3 or 6. Melody selection (9 available).

3000 AUDIO

PRIVACY

DESK KIT

VIDEX®

3000 Series audiophone for the VX2200 digital system

- Door open/concierge call button featuring a green door open LED.
- Privacy enable/disable button including a red privacy ON/OFF LED.
- Programmable number of rings (3 or 6) and melody selection (up to 9 available options to choose from).
- Local bell input, alarm input and door open LED connections.
- 3 level call tone volume adjustment: low, medium and high.
- Surface wall mounted or via desktop kit.
- Manufactured from shockproof ABS plastics, white finish.

Technical characteristics

Series	3000 series full base audiophone.
System	VX2200 digital system.
Number of buttons and function	2: door open/concierge call button and privacy ON/OFF button.
Privacy facility	Yes.
LEDs	2: door open (green) LED and privacy ON/OFF (red) LED.
Adjustments	3 level call tone volume switch (low, medium and high).
Programmable features	No. of rings: 3 or 6. Melody selection (9 available). Phone ID addressing via internal 8 way dip-switch (SW1). Privacy duration adjustment via internal 3 way dip-switch (SW2).
Inputs	Local bell, alarm input and door open LED connections.
Connection[1]	VX2200, 2 wire BUS audio.
Power supply input	7.5Vdc supplied by 2 wire BUS.
Power consumption	Standby 0.6mA, during operation 80mA.
Working temperature	-10°/+50°C.
Mounting	Surface (wall) or via desktop kit.
Material & finishes	White ABS shockproof plastics.
Dimensions (mm)	85 (W) x 218 (L) x 55 (D).
Desktop kit	**3038.**

[1] Additional wires will be required if using the local bell input, alarm input and door open LED connections.

Accessories

3038 Desktop kit
(inc. **895** wall socket)

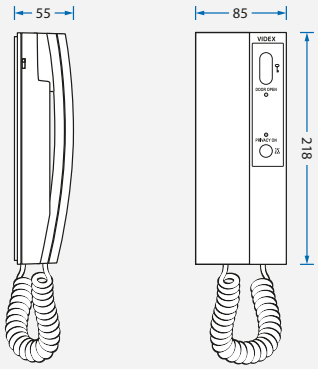

Measurements in mm

VIDEX U.K. Ltd

Main Office
Unit 4-7 Chillingham Ind. Estate, Chapman Street,
Newcastle Upon Tyne, NE6 2XX
tel: 0370 300 1240
sales@videxuk.com **www.videxuk.com**

DS-3176-ENUK-V2-1-02/10/26

Although every effort has been made to provide accurate information, there may be technical or print errors in this data sheet. Videx reserves the right to make changes, corrections and improvements to such information at any time and without prior notice.