3181

3000 SERIES

3000 Series audiophone for the "true" 2 wire BUS VX2300 digital system

3 level call tone switch

The **3181** audiophone is a surface mount 2 button intercom phone with a privacy/free access switch for use on the VX2300 digital system (audio & video). Manufactured from shockproof ABS plastics in a white finish.

VX2300

Intercom audiophone
A 3000 series intercom audiophone with electronic call tone & privacy or free access switch.

2 push buttons
Two push buttons: for door open lock release/intercommunication & concierge call and a BUS relay (**2305**) activation button.

LED indication
2 LEDs: green door open LED and red privacy/free access ON/OFF LED.

Privacy or Free Access feature
Enable or disable the service between privacy or free access.

Call tone switch
3 level call tone volume switch (low, medium and high).

Adjustments
Adjustable number of rings: 3 or 6.

Can be mounted onto a table top using a desktop kit

3000 AUDIO

PRIVACY

DESK KIT

VIDEX®

3000 Series audiophone for the VX2300 digital system

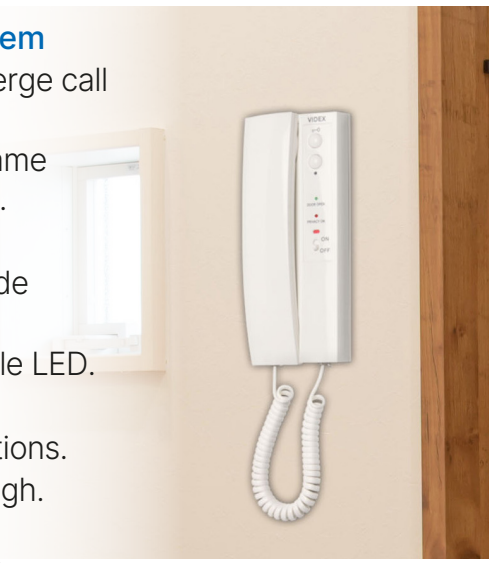

- 2 push buttons: door open/intercommunication & concierge call button and BUS relay (**2305**) activation button.
- Intercommunication feature between handsets in the same apartment or between handsets in different apartments.
- Concierge call feature for **CST2310** concierge station.
- Privacy enable/disable or free access enable/disable slide switch.
- Door open LED and privacy or free access enable/disable LED.
- Programmable number of rings (3 or 6).
- Local bell input, alarm input and door open LED connections.
- 3 level call tone volume adjustment: low, medium and high.
- Surface wall mounted or via desktop kit.
- Manufactured from shockproof ABS plastics, white finish.

Technical characteristics

Series	3000 series full base audiophone.
System	VX2300 2 wire BUS digital system.
Number of buttons and function	2: door open/intercommunication & concierge (**CST2310**) call button and BUS relay (**2305**) activation button.
Privacy/mute facility	Yes.
LEDs	2: door open (green) LED and privacy ON/OFF or free access enable/disable (red LED).
Adjustments	3 level call tone volume switch (low, medium and high). Internal BUS termination jumper (S1) for when more than one audiophone/videophone are connected in parallel on the BUS line (max. 4 devices).
Programmable features	No. of rings: 3 or 6. Phone ID addressing via internal 8 way dip-switch (SW1). Privacy or free access selection & setup via internal 3 way dip-switch (SW2). Intercommunication setup via internal 3 way dip-switch (SW3).
Inputs	Local bell, alarm input and door open LED connections.
Connection[1]	VX2300, 2 wire BUS.
Power supply input	32Vdc supplied by 2 wire BUS.
Power consumption	Standby 0.3mA, during operation 50mA, peak 70mA (max.).
Working temperature	-10°/+50°C.
Mounting	Surface (wall) or via desktop kit.
Material & finishes	White ABS shockproof plastics.
Dimensions (mm)	85 (W) x 218 (L) x 55 (D).
Desktop kit	**3038.**

Accessories

3038 Desktop kit
(inc. **895** wall socket)

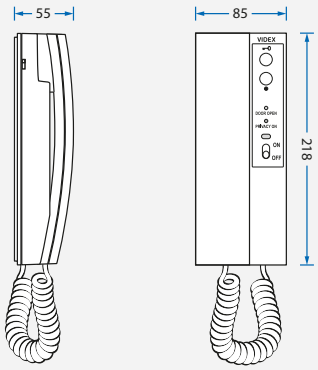

Measurements in mm

[1] Additional wires will be required if using the local bell input, alarm input and door open LED connections.

VIDEX U.K. Ltd

Main Office
Unit 4-7 Chillingham Ind. Estate, Chapman Street,
Newcastle Upon Tyne, NE6 2XX
tel: 0370 300 1240
sales@videxuk.com **www.videxuk.com**

DS-3181-ENUK-V2-1-02/10/26

Although every effort has been made to provide accurate information, there may be technical or print errors in this data sheet. Videx reserves the right to make changes, corrections and improvements to such information at any time and without prior notice.