HDR-15-12

VIDEX®

12Vdc Slimline Power Supply for the GSM, IPure and MiAccess Systems






Technical characteristics

Description	GSM, IPure and MiAccess 12Vdc slimline power supply.
Mains input	230Vac (50/60Hz) mains input.
Output voltage	12Vdc (+/-).
Current	1.25A.
Protection	Over Load protection type: constant current limiting, recovers automatically after fault condition is removed. Over Voltage protection type: 14.2V - 16.2Vdc, shut down output voltage, re-power ON to recover.
Voltage adjustment	Yes: variable POT, voltage adj. range: 10.8V - 13.8Vdc.
Power rating	15W (approx.).
Module enclosure	1.5 module A type DIN box.
Enclosure material	Grey high impact ABS plastics.
Mounting	Surface: DIN rail only.
Dimensions (mm)	17.5 (W) x 90 (L) x 58 (D).
Working temperature	-30°/+70°C.

The **HDR-15-12** power supply is primarily for use with GSM audiokits and IPure videokits, however can be used with the MiAccess proximity system.

It can also be used as a local power supply for the **4850R** proximity module and the **4903** codelock module.

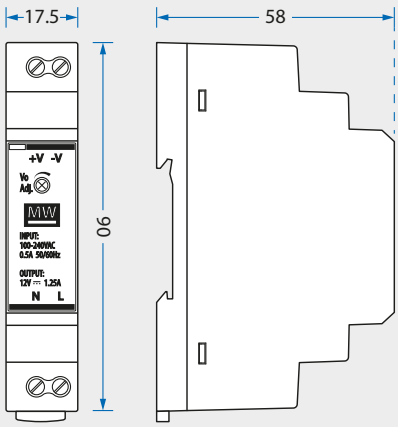

Measurements in mm

Main Office
Unit 4-7 Chillingham Ind. Estate, Chapman Street,
Newcastle Upon Tyne, NE6 2XX
tel: 0370 300 1240
VIDEX U.K. Ltd **sales@videxuk.com** **www.videxuk.com**

DS-HDR1512-ENUK-V3-1 - 09/10/26

Although every effort has been made to provide accurate information, there may be technical or print errors in this data sheet. Videx reserves the right to make changes, corrections and improvements to such information at any time and without prior notice.