

ART. 3181

3000 Series full base "true" 2 wire BUS digital audiophone which incorporates an electronic call tone with an adjustable 3 level volume control. It also includes a "door open" push button with a "door open" LED, secondary push button to activate a BUS relay unit (Art.2305) and privacy switch with privacy ON illumination LED.

For use on the "true" 2 wire VX2300 digital audio and video system.

Call tone adjustment: 3 level (low, medium and high) call tone switch.

Privacy switch: 1 sliding ON/OFF privacy switch (timed).

Privacy adjustments: 1 internal 3 way dip-switch to set the privacy time.

Privacy indication: 1 privacy illumination LED (red).

Door open indication: 1 door open illumination LED (green).

Intercommunicating setup: 1 internal 3 way dip-switch to set the intercommunication mode.



3181
3000 Series Audiophone
QUICK GUIDE




TECHNICAL SUPPORT
 Tel: 0191 224 3174
 Fax: 0191 224 4938
 Email: tech@videxuk.com
 Web: www.videxuk.com




ANSWERING A CALL

beep!
beep!


During a call



1 To answer an incoming call pick up the handset.




2 With the handset lifted a conversation with the caller can begin.





3 To end the call replace the handset back on the cradle.

TO OPEN THE DOOR




During a conversation



1 During a conversation, with the handset lifted, press the lock button  to operate the lock.



2 The door open LED will switch ON to indicate the door is open (if this was set up during the installation).




3 To end the call replace the handset back on the cradle.


INTERCOMMUNICATING CALL


zZz
zZz


When the system is in standby




1 Pick up the handset.



2 Press the lock button  as many times as the extension ID*¹ or phone ID*².

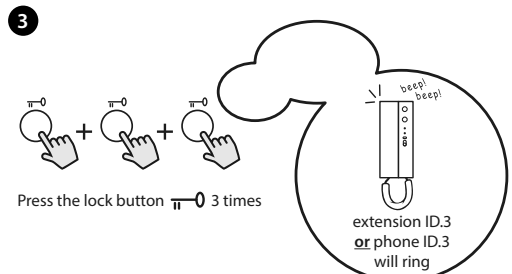

i.e. if calling extension ID.3 or phone ID.3, press the lock button  3 times.


*1 If setup for local intercommunication mode (i.e. communication between phones in the same apartment) extension ID's 1 - 4 can be called.

*2 If setup for external intercommunication mode (i.e. communication between phones in different apartments) phone ID's 1 up to the max. phone ID used on the system.

SECONDARY PUSH BUTTON (IF ART.2305 AVAILABLE)

zZz
zZz

When the system is in standby




1 Pick up the handset. Press the secondary button as many times as the ID of the BUS relay to enable (if an Art.2305 was setup during the installation, refer to Art.2305 manual).



2 X3 if Art.2305
ID = 3

TECHNICAL ADVICE



For further technical advice and assistance on the installation of this product please contact Videx technical on tel: 0191 224 3174.

For any sales advice and assistance please contact Videx sales on tel: 0191 238 8324.

To download a copy of this quick guide visit the Videx website: www.videxuk.com