3112

3000 Series audiophone for "4+1" audio systems and audiokits, also 6 wire videokits

3 level call tone switch

Intercom audiophone

A 3000 series intercom audiophone with electronic call tone & mute switch.

2 push buttons

Two push buttons: for door open lock release and a spare service button.

Privacy facility

Mute ON/OFF privacy switch.

Call tone switch

3 level call tone volume switch (low, medium and high).

Can be mounted onto a table top using a desktop kit

The **3112** audiophone is a surface mount 2 button intercom phone with an ON/OFF mute switch for use on "4+1" audiokits and 6 wire videokits. Manufactured from shockproof ABS plastics in a white finish.

3000 AUDIO | 4+1 AUDIO | PRIVACY | DESK KIT

VIDEX®

3000 Series audiophone for traditional "4+1" audio systems and 6 wire videokits

- 2 push buttons: door open and spare service button.
- Electronic call tone.
- Mute ON/OFF privacy switch.
- 3 level call tone volume adjustment: low, medium and high.
- Compatible with 4K series, 8K series, VR4K series and VR120DK series "4+1" audiokits.
- Comaptible with VK4K series, VK8K series and CVR4KV series (1 & 2 button) 6 wire videokits.
- Surface wall mounted or via desktop kit.
- Manufactured from shockproof ABS plastics, white finish.

Technical characteristics

Series	3000 series full base audiophone.
System compatiblity	Can be used on "4+1" audiokits: 4K series, 8K series, VR4K series and VR120DK series. Can also be used on 6 wire videokits: VK4K series, VK8K series and CVR4KV series (1 & 2 button kits only).
Call type	Electronic call tone.
Number of buttons and function	2: door open and spare service button.
Privacy/mute facility	Yes.
LEDs	No.
Adjustments	3 level call tone volume switch: low, medium and high. Mute ON/OFF privacy switch.
Connection[1]	5 wires total: 4 common wires (transmit speech, receive speech, GND & lock release) + 1 call wire.
Working temperature	-10°/+50°C.
Mounting	Surface (wall) or via desktop kit.
Material & finishes	White ABS shockproof plastics.
Dimensions (mm)	85 (W) x 218 (L) x 55 (D).
Desktop kit	**3038.**

[1] Additional wires will be required if using the spare service button.

Accessories

3038 Desktop kit
(inc. **895** wall socket)

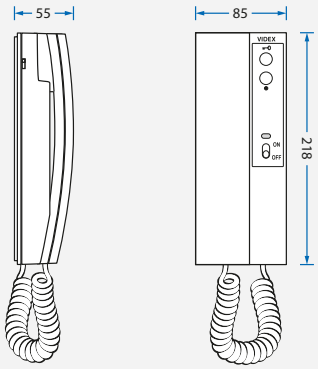

Measurements in mm

VIDEX U.K. Ltd

Main Office
Unit 4-7 Chillingham Ind. Estate, Chapman Street,
Newcastle Upon Tyne, NE6 2XX
tel: 0370 300 1240
sales@videxuk.com **www.videxuk.com**

Although every effort has been made to provide accurate information, there may be technical or print errors in this data sheet. Videx reserves the right to make changes, corrections and improvements to such information at any time and without prior notice.