3172

3000 Series audiophone for the VX2200 digital system

3 level call tone switch

VX2200

Intercom audiophone

A 3000 series intercom audiophone with electronic call tone & mute switch.

2 push buttons

Two push buttons: for door open lock release/concierge call and a spare service button.

Privacy facility

Mute ON/OFF privacy switch.

Call tone switch

3 level call tone volume switch (low, medium and high).

Adjustments

Adjustable number of rings: 3 or 6. Melody selection (9 available).

Can be mounted onto a table top using a desktop kit

The **3172** audiophone is a surface mount 2 button intercom phone with an ON/OFF mute switch for use on the VX2200 digital system (audio & video). Manufactured from shockproof ABS plastics in a white finish.

3000 AUDIO

PRIVACY

DESK KIT

VIDEX®

3000 Series audiophone for the VX2200 digital system

- 2 push buttons: door open/concierge call button and spare service button.
- Mute ON/OFF privacy switch.
- Programmable number of rings (3 or 6) and melody selection (up to 9 available options to choose from).
- Local bell input and alarm input.
- 3 level call tone volume adjustment: low, medium and high.
- Surface wall mounted or via desktop kit.
- Manufactured from shockproof ABS plastics, white finish.

Technical characteristics

Series	3000 series full base audiophone.
System	VX2200 digital system.
Number of buttons and function	2: door open/concierge call button and spare service button.
Privacy/mute facility	Yes.
LEDs	No.
Adjustments	3 level call tone volume switch (low, medium and high). Mute ON/OFF privacy switch.
Programmable features	No. of rings: 3 or 6. Melody selection (9 available). Phone ID addressing via internal 8 way dip-switch (SW1).
Inputs	Local bell and alarm input.
Connection[1]	VX2200, 2 wire BUS audio.
Power supply input	7.5Vdc supplied by 2 wire BUS.
Power consumption	Standby 0.6mA, during operation 80mA.
Working temperature	-10°/+50°C.
Mounting	Surface (wall) or via desktop kit.
Material & finishes	White ABS shockproof plastics.
Dimensions (mm)	85 (W) x 218 (L) x 55 (D).
Desktop kit	**3038.**

[1] Additional wires will be required if using the local bell input, alarm input and spare service button.

Accessories

3038 Desktop kit
(inc. **895** wall socket)

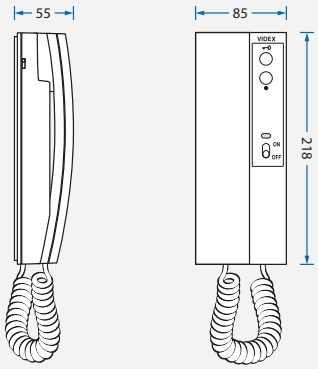

Measurements in mm

VIDEX U.K. Ltd

Main Office
Unit 4-7 Chillingham Ind. Estate, Chapman Street,
Newcastle Upon Tyne, NE6 2XX
tel: 0370 300 1240
sales@videxuk.com **www.videxuk.com**

DS-3172-ENUK-V2-1-02/10/26

Although every effort has been made to provide accurate information, there may be technical or print errors in this data sheet. Videx reserves the right to make changes, corrections and improvements to such information at any time and without prior notice.